



- 1. All joints in hydrant run-out to be restrained joints.
- 2. See MAG Std. Detail 391—C for valve box installation.
- 3. For water valve blocking see MAG Std. Detail 301.
- 4. For additional information see MAG Std. Detail 360.

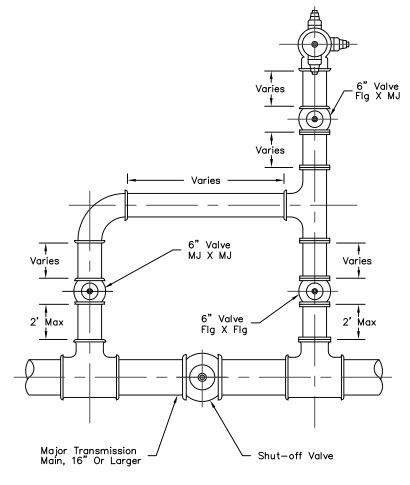

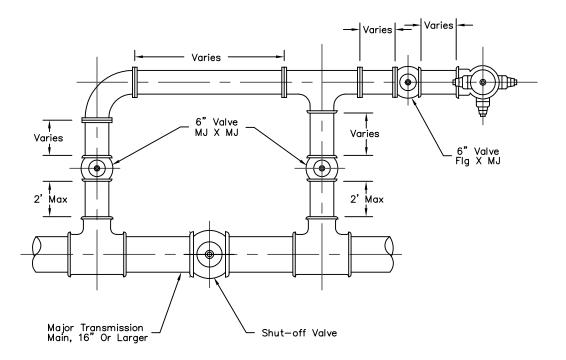

2361 City of Scottsdale Standard Details

REVISED 7/20/95

APPROVED BY:

FIRE HYDRANT BYPASS ASSEMBLY

DETAIL NO.

2361